


# Shrink Ratio Double-sided Printable PermaSleeve Markers

## 3:1 Shrink Ratio Double-sided Printable PermaSleeve™ Markers



Brady's PermaSleeve markers provide a complete wire marking solution that combines speed, ease of use, and permanence to create long-lasting, high quality identification.

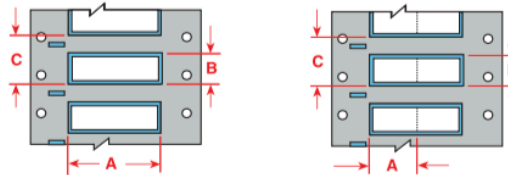

PermaSleeve full-circle markers are available in a 3:1 shrink ratio to cover a wider range of wire diameters per sleeve size.

## White Polyolefin (B-342) Double-sided Printable PermaSleeve Markers

| Order Reference              | Markers Per Box | Range of Wire Dia. |         | Approx. Wire Gauge** | Marker Width | Marker Height | Vertical Repeat | Recommended Ribbon |
|------------------------------|-----------------|--------------------|---------|----------------------|--------------|---------------|-----------------|--------------------|
|                              |                 | Min. mm            | Max. mm |                      | A            | B             | C               |                    |
| <b>50.80 mm Marker Width</b> |                 |                    |         |                      |              |               |                 |                    |
| 3PS-094-2-WT                 | 2 500           | 0.58 – 2.03        |         | 28-18                | 50.80        | 4.60          | 12.70           | R-4300             |
| 3PS-094-2-WT-S               | 500             | 0.58 – 2.03        |         | 28-18                | 50.80        | 4.60          | 12.70           | R-4300             |
| 3PS-125-2-WT                 | 2 500           | 1.17 – 2.79        |         | 22-16                | 50.80        | 6.00          | 12.70           | R-4300             |
| 3PS-125-2-WT-S               | 500             | 1.17 – 2.79        |         | 22-16                | 50.80        | 6.00          | 12.70           | R-4300             |
| 3PS-187-2-WT                 | 2 500           | 1.57 – 3.81        |         | 18-12                | 50.80        | 8.50          | 16.00           | R-4300             |
| 3PS-187-2-WT-S               | 500             | 1.57 – 3.81        |         | 18-12                | 50.80        | 8.50          | 16.00           | R-4300             |
| 3PS-250-2-WT                 | 2 500           | 2.39 – 5.46        |         | 16-10                | 50.80        | 11.15         | 19.05           | R-4300             |
| 3PS-250-2-WT-S               | 500             | 2.39 – 5.46        |         | 16-10                | 50.80        | 11.15         | 19.05           | R-4300             |
| 3PS-375-2-WT                 | 1 000           | 3.18 – 8.13        |         | 12-6                 | 50.80        | 16.40         | 25.40           | R-4300             |
| 3PS-375-2-WT-S               | 250             | 3.18 – 8.13        |         | 12-6                 | 50.80        | 16.40         | 25.40           | R-4300             |
| 3PS-500-2-WT                 | 500             | 4.75 – 11.43       |         | 8-1                  | 50.80        | 21.60         | 31.75           | R-4300             |
| 3PS-500-2-WT-S               | 250             | 4.75 – 11.43       |         | 8-1                  | 50.80        | 21.60         | 31.75           | R-4300             |

\*\*Based on National Electric Code insulation measurement of THHN wire.

Sleeves may be perforated at factory for shorter marker lengths. Depending on overall length, sleeves may be perforated in halves, thirds or fourths. Contact your Brady Identification Solutions Distributor or Customer Service Representative for ordering information.